



MOUNTING SUGGESTIONS:

Harley-Davidson® Dyna 2006-2014 Spring Solo Kit

Hardware (Included):	Vinyl frame cover with three plastic retaining plugs Rear bracket with spring support posts Spring Solo assembly with springs and pouch attached Black nylon washer x4 5/16" zinc washer x2 5/16"-18 x 4" bolt 5/16"-18 nut
Tools needed:	Phillips screwdriver T-40 Torx wrench 1/2" wrenches

Removal of Stock Seat:

One-piece stock seat:

1. Remove the rear 1/4"-20 fender screw with a Phillips screwdriver and set it aside. (Fig. 1)

2. Remove the handstrap if present.

3. Slide the seat up and back to disengage the front bracket and remove the seat.

4. Remove any rubber bumpers or handstrap bolts from the fender. These are not needed to mount your Mustang seat.



Fig. 1

Installation of Mustang Seat:

1. Locate the four bolts mounting the seat support plate to the frame rails. Remove the two rearmost bolts with a T-40 Torx wrench and set aside. They will be needed to mount the Mustang solo. (Fig. 2)

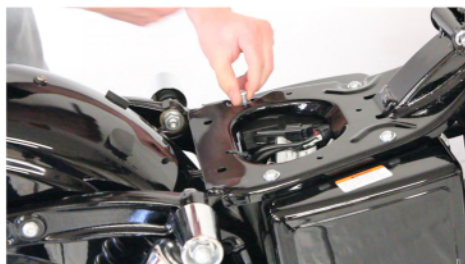


Fig. 2

2. Place provided vinyl frame cover onto seat support plate and clip into the existing holes with the three plastic retaining plugs. (Fig. 3)



Fig. 3

3. Position two of the black nylon washers under the left side of the frame cover and over the empty frame rail bolt hole. Position the rear bracket over the frame cover with the spring posts pointing up, lining up the front holes with the frame rail bolt holes. Reinsert the stock Torx bolts through the rear bracket, frame cover, (nylon washers on left side) and into the frame rails, and finger-tighten.



Fig. 4

4. Locate and remove the cross bolt behind the tank using two 1/2" wrenches. Position the seat onto the frame by lining up the rear springs with the spring support posts on the rear bracket. Line up the front seat bracket around the front motorcycle mount. (Fig. 5)



Fig. 5

Installation of Mustang Seat: (cont.)

5. Place one zinc washer onto the 5/16"-18 x 4" bolt and insert partially into left side of front seat bracket. Insert one nylon washer between the seat bracket and the motorcycle bracket and push the bolt through the nylon washer and the motorcycle mount. Insert the final nylon washer between the right side of the motorcycle mount and the seat bracket, push the bolt through this nylon washer and the right portion of the seat bracket. (Fig. 6) Add the second zinc washer, and secure with either the provided 5/16" nut or the stock chrome acorn nut using two 1/2" wrenches. (Fig. 7)



Fig. 6



Fig. 7

6. Adjust the back bracket so the spring support posts insert into the bottom coils of the seat springs. (Fig. 8) Tighten the frame rail bolts securely. (Fig. 9)



Fig. 8



Fig. 9

Enjoy the comfort and custom look of your new Mustang seat!



These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Refers to part number: 76867

A Unique -Invitation-

You are cordially invited to tour Mustang Motorcycle Seats! See how our craftspeople take pride in transforming raw materials into the world's highest quality, most comfortable handcrafted seats. Please contact Mustang for more information regarding tours of our historic Three Rivers, MA, facility (only 75 miles west of Boston and 150 miles northeast of New York City). Our two hour tours are by reservation only; we can accommodate groups from 2 to 24. We promise you will ride away with an entirely new awareness of what you put between you and your bike.